

CONTROL UNIT USB1 for safety valves type SiZ 2507

Offered control unit type **USB** is designed to control full stroke spring loaded safety valves of open type design **SiZ 2507**.


Depending on valve opening pressure (setting) it is manufactured in following versions :

- **USB1A060** – scope of setting: **0 – 60 bar**,
- **USB1A160** – scope of setting: **60 – 160 bar**,
- **USB1A250** – scope of setting: **160 – 250 bar**.

Operating data

Operating medium	compressed air
Air consuming / normal operation - closed safety valve /	about 0,1 m³/h
Air consuming / normal operation - open safety valve	about 25 m³/h

Dimensions and weights

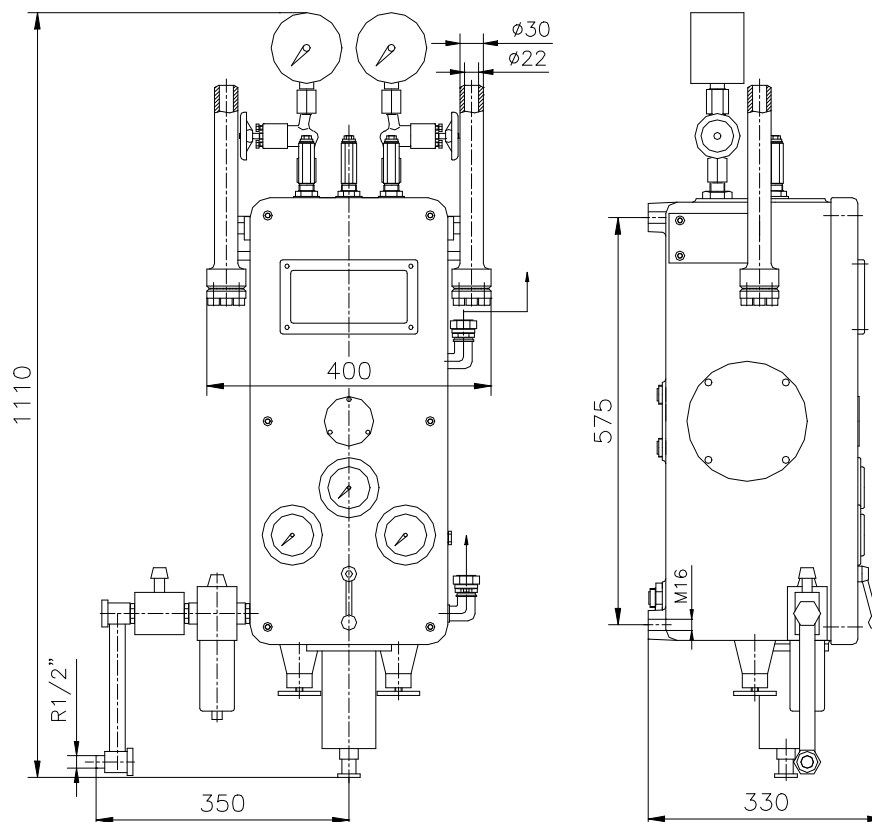

Weight USB = 68 kg

Diagram of control unit USB

